




C22

Power Drive Counterbalanced

Walkie version of the sit-down rider lift truck makes it an ideal choice for manufacturing work cells and handling a variety of load sizes.

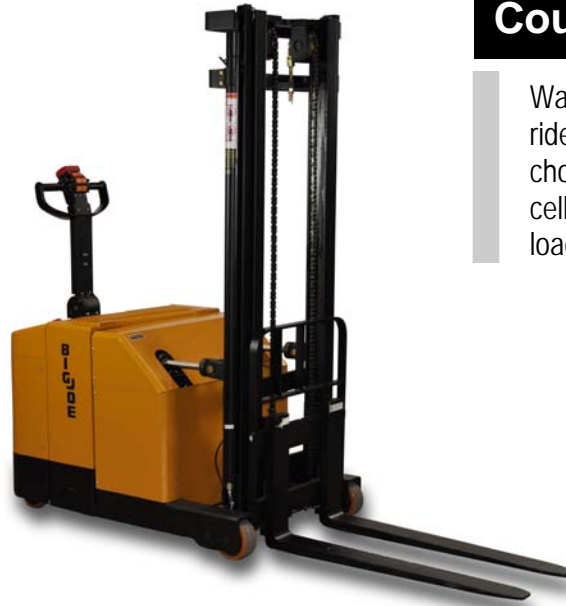

CAPACITY

2200 lbs. at 24" load center

BATTERY

Battery compartment: 33" x 10.5" x 21" tall, with removable side panel and top compartment covers. Connector Anderson 175 Gray-A22. Minimum battery weight 490 lbs.

PERFORMANCE

24-Volt Curtis SepEx® transistor travel control. Gradeability 12% - loaded.

TRAVEL

Variable from 0 mph to 3.5 mph empty
Variable from 0 mph to 3.0 mph loaded

LIFT

Up to 34 fpm empty.
Up to 24 fpm loaded—2000 lbs

LOWERING

Up to 28 fpm empty.
Up to 56 fpm loaded—2000 lbs

CHASSIS WEIGHT

3533 lbs. without battery

WHEELS

DRIVE WHEEL
10" x 3" polyurethane
STABILITY WHEEL
4.5" x 2.2" polyurethane
LOAD WHEELS
6" x 3" polyurethane

CONTROL HANDLE

Protective wraparound hand guard, horn, "Belly Button" reversing switch, thumb travel control are all standard. Handle mounted lift/lower/tilt buttons allow uncomplicated and precise load placement. Braking at top and bottom of the handle working range.

HYDRAULICS

Premium design side mounted mast lift cylinders provides smooth lifting. Full system filtration prevents contaminants from entering the hydraulic system. 24V 3.0kw lift pump motor is designed for peak efficiency at lifting torque.

ELECTRICAL

Curtis SepEx® transistor travel controller provides infinitely variable travel speeds with efficient use of battery power. Control circuits are fuse-protected with auto reset circuit breaker; plug-in type connectors.

DRIVE UNIT AND BRAKES

Compact 24V 1.35kw drive motor provides ample torque at low current and temperature levels.

Regenerative "neutral braking" allows for controlled downhill travel while reducing heat build-up extending motor brush life. Drive motor, transmission, electric brake and drive wheel are positively coupled to the control arm, providing operator direct control of all drive functions.

The entire drive system is mounted within the truck frame for maximum protection. Offset drive wheel with stability caster assembly allow for easy steering.

FRAME AND MAST

All steel construction. Forward tilt 3° back tilt 6° . Wire mesh safety screen, 33" tall load back rest. Class II ITA fork carriage. Forks are adjustable: 8" ID to 22.3" OD.

High visibility mast design nested two stage I-beam construction with lift cylinders positioned in outer I-beam location for best view through mast.

SERVICEABILITY

Removable two piece power head cover exposes major components for inspection and service. Battery compartment includes flip top cover, removable side panels, and battery compartment rollers for ease of maintenance.

STANDARD EQUIPMENT

- Battery discharge indicator (BDI)
- Key switch
- Hour meter
- ITA Class II fork carriage
- Load backrest (LBR) 33" tall
- Tilting Mast



AGM BATTERY PACK

24-Volt maintenance free (4)6V 224 AH 5.4 kwh built-in 110V plug-in automatic "Smart" charger.

